

关于卧龙

1984


30

卧龙集团

产品介绍

1Ph 230VAC 50/60Hz			
0.15kW~0.3kW			
≥ 0.6			
-25	60	-40	
-30~40			
0-10V RS485			
B3	B30	B14	
IP20	IP44	IP55	IP66
C3-H	C4-H		
UL	CE	CCC	

		[V]	[Hz]	[kW]	[r/min]					[A]	[%]		
EM4210A15***	1~220-240	50/60	0.15	720/960/1000/1050/1200				200~1200	1.4	80%			
EM4210A13***	1~220-240	50/60	0.25	720/960/1000/1050/1200				200~1200	2.1	81%			
EM4210A12***	1~220-240	50/60	0.37	960/1000/1050/1200				200~1200	2.8	82%			
EM4210B15***	1~220-240	50/60	0.15	1350/1500/1800/2200				200~2200	1.5	81%			
EM4210B13***	1~220-240	50/60	0.25	1350/1500/1800/2200				200~2200	2.2	82%			
EM4210B12***	1~220-240	50/60	0.3	1350/1500/1800/2200				200~2200	3	83%			
	A	B	C	D	E	H	K	L	AB	AC	BB	EB	HD
42	112	90	45	12.7/15/17/20	/	71	8.5	244	135	102.5	110	/	135

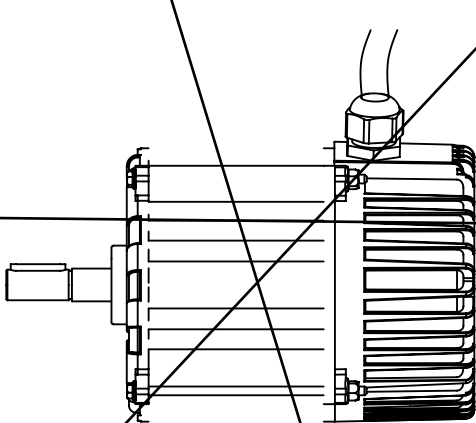


3Ph 380~480VAC 50/60Hz			
1.1	2.2kW		
≥ 0.9			
-25	~55	-40	
-30~40			
0-10V RS485			
B3	B30	B14	
IP55	IP66		
C3-H	C4-H		
UL	CE		

		[V]		[Hz]		[kW]		[r/min]					[A]		[%]	
EM5610A32***		3~380-480V		50/60		1.1		720/960/1000/1050/1200			200~1200		2.4		86%	
EM5610A21***		3~380-480V		50/60		1.5		720/960/1000/1050/1200			200~1200		3.2		87%	
EM5610A31***		3~380-480V		50/60		2.2		960/1000/1050/1200			200~1200		4.5		88%	
EM5610B32***		3~380-480V		50/60		1.1		1350/1500/1800/2200			200~2200		2.4		88%	
EM5610B21***		3~380-480V		50/60		1.5		1350/1500/1800/2200			200~2200		3.2		89%	
EM5610B31***		3~380-480V		50/60		2.2		1350/1500/1800/2200			200~2200		4.5		90%	
	A	B	C	D	E	H	K	L	AB	AC	BB	EB	HD			
56	140	100	/	20/24	/	90/100	11	/	180	138.5	130	/	141			

1Ph 115, 230,460VAC 3Ph 380~480VAC 50/60Hz			
1/4~1HP,max 1kW			
≥ 0.7			
-20	~55	-40	-30~40
0-10V RS485 PWM			
B3 B30			
IP20 IP44 IP55 IP66			
C3-H C4-H			
UL CE CCC			

	[V]	[Hz]	[HP]	[r/min]		[A]	[%]
EM4810B14***	1~115/230	50/60	1/4	720/960/1000/1050/1200	200~1200	3.1/1.8	81%
EM4810B12***	1~115/230	50/60	1/3	720/960/1000/1050/1200	200~1200	3.6/2.4	82%
EM4810B12***	1~115/230	50/60	1/2	720/960/1000/1050/1200	200~1200	5.9/3.3	82%
EM4810A34***	1~115/230	50/60	3/4	720/960/1000/1050/1200	200~1200	8/4.68	83%
EM4810A11***	1~115/230	50/60	1	960/1000/1050/1200	200~1200	9.5/5.8	84%
EM4810D14***	1~115/230	50/60	1/4	1350/1500/1800	200~1800	3.7/1.7	82%
EM4810D12***	1~115/230	50/60	1/3	1350/1500/1800	200~1800	4/2.2	83%
EM4810D12***	1~115/230	50/60	1/2	1350/1500/1800	200~1800	5.9/3.2	83%
EM4810C34***	1~115/230	50/60	3/4	1350/1500/1800	200~1800	8.4/4.5	85%
EM4810C11***	1~115/230	50/60	1	1350/1500/1800	200~1800	10.7/5.9	86%
EM4810E14***	1~460~480	50/60	1/4	1000/1050/1200/1500/1800	120~1800	0.85	83%
EM4810E12***	1~460~480	50/60	1/3	1000/1050/1200/1500/1800	120~1800	1.6	86%
EM4810E12***	1~460~480	50/60	1/2	1000/1050/1200/1500/1800	120~1800	1.6	86%
EM4810E34***	1~460~480	50/60	3/4	1000/1050/1200/1500/1800	120~1800	2.25	87%
EM4810E11***	1~460~480	50/60	1	1000/1050/1200/1500/1800	120~1800	3	88%

	[V]	[Hz]	[HP]	[r/min]		[A]	[%]
EM4810F14***	3~380~480	50/60	1/4	1000/1050/1200/1500/1800	120~1800	0.52~0.45	84%
EM4810F12***	3~380~480	50/60	1/3	1000/1050/1200/1500/1800	120~1800	0.95~0.84	87%
EM4810F12***	3~380~480	50/60	1/2	1000/1050/1200/1500/1800	120~1800	0.95~0.84	87%
EM4810F34***	3~380~480	50/60	3/4	1000/1050/1200/1500/1800	120~1800	1.33~1.16	88%
EM4810F11***	3~380~480	50/60	1	1000/1050/1200/1500/1800	120~1800	1.77~1.52	89%
	D	E	F	L	AC	D	
48	12.7/15/17/20	/	/	/	143	/	

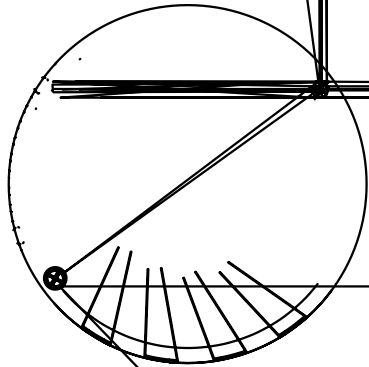

3Ph 380~480VAC 50/60Hz		
1.5	3kW	
≥ 0.9		
-25	~55	-40
-30~40		
0-10V	RS485	
B30		
IP55	IP66	
C3-H	C4-H	
UL	CE	

	[V]	[Hz]	[kW]	[r/min]		[A]	[%]
EM13210A31***	3~380-480V	50/60	1.5	720/960/1000/1200	200~1200	3.0~2.4	89%
EM13210A31***	3~380-480V	50/60	1.8	720/960/1000/1200	200~1200	3.5~2.9	89%
EM13210A31***	3~380-480V	50/60	2.2	720/960/1000/1200	200~1200	4.3~3.5	90%
EM13210A72***	3~380-480V	50/60	2.6	960/1000/1200	200~1200	5.0~4.0	90%
EM13210A41***	3~380-480V	50/60	3.0	960/1000/1200	200~1200	5.8~4.5	90%
EM13210B31***	3~380-480V	50/60	1.5	1300/1450/1500/1800	200~1800	3.0~2.4	90%
EM13210B31***	3~380-480V	50/60	1.8	1300/1450/1500/1800	200~1800	3.5~2.9	90%
EM13210B31***	3~380-480V	50/60	2.2	1300/1450/1500/1800	200~1800	4.3~3.5	91%
EM13210B72***	3~380-480V	50/60	2.6	1300/1450/1500/1800	200~1800	5.0~4.0	91%
EM13210B41***	3~380-480V	50/60	3.0	1300/1450/1500/1800	200~1800	5.8~4.5	91%



